
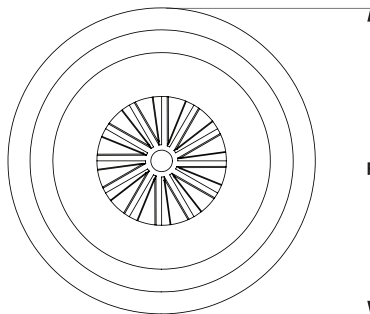


HIGH VELOCITY NOZZLE - TWIST SERIES

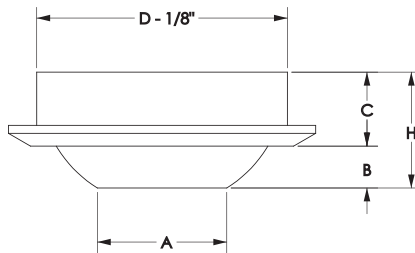

HIGH VELOCITY ADJUSTABLE AIR OUTLET

- Reduced Throw Increased Spread Pattern
- Surface Mount
- Suitable for Heating & Cooling Applications

ADJUSTABILITY

- Easy Finger Tip Adjustment
- Directional Air Pattern Control
360° Global Rotation
Minimum ±30° Deflection

MODEL	SIZE	A	B	C	D	F	H
HVT-08	8	3-1/4	1	2-9/16	8	10-1/4	3-9/16
HVT-10	10	4-5/8	1-5/8	2-3/4	10	12-1/4	4-3/8
HVT-12	12	6	2	3-1/2	12	14-1/4	5-1/2
HVT-14	14	7	2-3/8	3-11/16	14	16-1/4	6-1/16
HVT-16	16	8	2-7/16	4-1/2	16	18-1/4	6-15/16
HVT-20	20	10	3-3/16	5-1/2	20	22-1/4	8-11/16

(Inches measured to the nearest 1/16")

STANDARD MATERIAL

- Heavy Gauge Aluminum

NOTES

- Mounting Screws Included
- Concealed Mounting
- Architectural Cover Plate

STANDARD FINISHES

- #00 mill
- #12 anodized powder coat
- #42 gloss black powder coat
- #43 flat black powder coat
- #52 white powder coat
- #62 grey primer powder coat
(for field painting)
- #72 silver metallic powder coat
- #99 custom color / color match
(paint chip required)

PROJECT :	<h2>HVT SERIES</h2> <p>HIGH VELOCITY NOZZLE-TWIST</p>
ARCHITECT :	
ENGINEER :	
CONTRACTOR :	
SUBMITTED BY :	FORM # : 20042S
DATE :	DRAWN BY : MH JANUARY 2018