
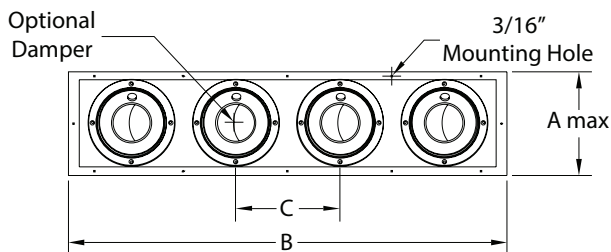
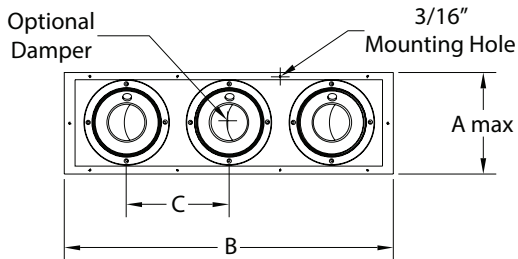
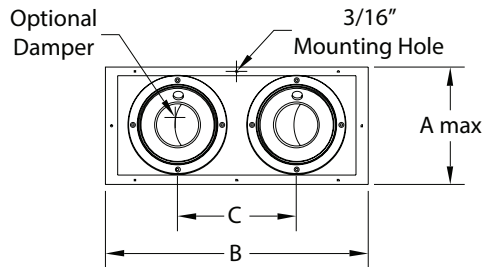


## Aluminum Punkah Louver - Curved Frame Series

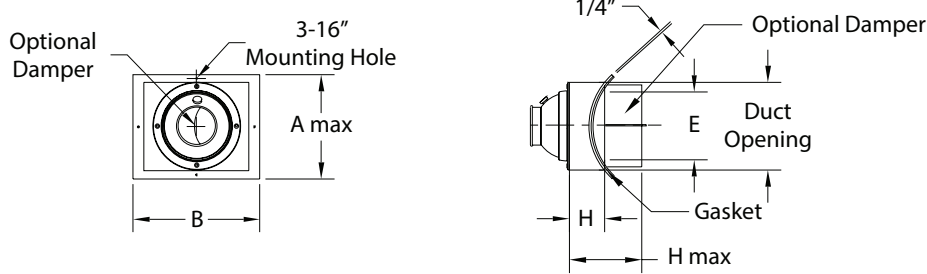

### High Velocity Task Air Outlet

- Low Noise Levels
- Low Pressure Requirements

### Adjustability

- Easy Finger Tip Adjustment
- Directional Air Pattern Control:
  - 70 Degree Global Rotation Minimum
  - ±35 Degree Deflection
  - 360 Degree Rotation

### Standard Material

- Heavy Gauge Aluminum
- Stainless Steel Damper Hardware
- Foam Gasket

### Options

- Aperture Damper
- Extractor Damper
- Duct Diameter \_\_\_\_\_
- Custom Finish \_\_\_\_\_

### Standard Finishes

- #12 anodized powder coat
- #42 gloss black powder coat
- #43 flat black powder coat
- #52 white powder coat
- #62 grey primer powder coat (on field painting)
- #72 silver metallic powder coat
- #99 custom color / color match (paint chip needed)

### Notes

- Mounting Screws Included
- "A" in Model Name Designates Aperture Damper

<b>Project :</b>		<b>APL-C Series</b> Aluminum Punkah Louver -Curved Frame Series
<b>Architect :</b>		
<b>Engineer :</b>		
<b>Contractor :</b>		
<b>Submitted By :</b>		<b>Form # : 20033S</b>
<b>Date :</b>		<b>Drawn By : MH January 2016</b>

## Aluminum Punkah Louver - Curved Frame Series

MODEL	E	APL PER PANEL	C	A-Max	B	H	H-Max	Duct Opening	Min. Duct Dia.
APL-04C-1 / 04AC-1	4	1	-	9	9	3	10-3/16	7 x 7	8
APL-04C-2 / 04AC-2	4	2	6	9	17-1/2	3	10-3/16	7 x 15-1/2	8
APL-04C-3 / 04AC-3	4	3	6	9	22-1/2	3	10-3/16	7 x 20-1/2	8
APL-04C-4 / 04AC-4	4	4	6	9	28-1/2	3	10-3/16	7 x 26-1/2	8
APL-06C-1/ 06AC-1	6	1	-	11	11	3	12	9 x 9	10
APL-06C-2/ 06AC-2	6	2	9	11	21-1/2	3	12	9 x 19-1/2	10
APL-06C-3 / 06AC-3	6	3	9	11	30-1/2	3	12	9 x 28-1/2	10
APL-06C-4 / 06AC-4	6	4	9	11	39-1/2	3	12	9 x 37-1/2	10
APL-08C-1/ 08AC-1	8	1	-	13	13	4	12-3/4	11 x 11	12
APL-08C-2 / 08AC-2	8	2	12	13	26-1/2	4	12-3/4	11 x 24-1/2	12
APL-08C-3 / 08AC-3	8	3	12	13	38-1/2	4	12-3/4	11 x 36-1/2	12
APL-08C-4 / 08AC-4	8	4	12	13	50-1/2	4	12-3/4	11 x 48-1/2	12
APL-10C-1 / 10AC-1	10	1	-	15	15	4	14-1/2	13 x 13	14
APL-10C-2 / 10AC-2	10	2	13	15	29-1/2	4	14-1/2	13 x 27-1/2	14
APL-10-C3 / 10AC-3	10	3	13	15	42-1/2	4	14-1/2	13 x 40-1/2	14
APL-10C-4 / 10AC-4	10	4	13	15	55-1/2	4	14-1/2	13 x 53-1/2	14
APL-12C-1 / 12AC-1	12	1	-	17	17	4	16-1/8	15 x 15	18
APL-12C-2 / 12AC-2	12	2	15	17	33-1/2	4	16-1/8	15 x 31-1/2	18
APL-12C-3 / 12AC-3	12	3	15	17	48-1/2	4	16-1/8	15 x 46-1/2	18
APL-12C-4 / 12AC-4	12	4	15	17	63-1/2	4	16-1/8	15 x 61-1/2	18

(Inches measured to the nearest 1/16")

### Standard Material

- Heavy Gauge Aluminum
- Stainless Steel Damper Hardware
- Foam Gasket

### Options

- Aperture Damper
- Extractor Damper
- Duct Diameter \_\_\_\_\_
- Custom Finish \_\_\_\_\_

### Standard Finishes

- #12 anodized powder coat
- #42 gloss black powder coat
- #43 flat black powder coat
- #52 white powder coat
- #62 grey primer powder coat (on field painting)
- #72 silver metallic powder coat
- #99 custom color / color match (paint chip needed)

### Notes

- Mounting Screws Included
- "A" in Model Name Designates Aperture Damper

<b>Project :</b>	<h2>APL-C Series</h2> <p>Aluminum Punkah Louver -Curved Frame Series</p>	
<b>Architect :</b>		
<b>Engineer :</b>		
<b>Contractor :</b>	<b>Form # : 20033S</b>	
<b>Submitted By :</b>	<b>Date :</b>	<b>Drawn By : MH January 2016</b>