



AIRCONCEPTS

AIR DISTRIBUTION PRODUCTS




SDR SERIES

SDR

Swirl Diffuser - Round Panel

Swirl Diffuser Dimensions in Inches

MODEL	A	B	C	D	H	O
SDR-06	10	1 3/16	2 1/4	6	2	7 1/2
SDR-08	12	1 3/16	2 1/4	8	2	9 1/2
SDR-10	15	1	2 1/4	10	2	11 7/8
SDR-12	17	1	2 1/4	12	2	13 7/8
SDR-14	20	1 1/2	2 3/4	14	2 1/2	17 7/8
SDR-16	22	1 3/8	2 3/4	16	2 1/2	18 3/8
SDR-20	28	1 1/2	3 1/2	20	3 1/4	23 3/8
SDR-24	34	1 1/2	3 13/16	24	3 1/2	27 7/8

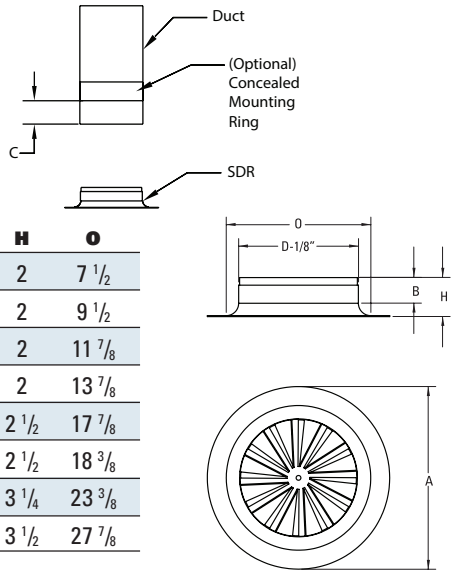

High Velocity/ High Aspiration Air Outlet

Swirl pattern design
Easy installation

Construction

Heavy gauge aluminum face
Optional Concealed Mounting System

Finishes

Standard: #52 White powder coat
Optional standard: #00 Mill
#12 Anodized powder coat
#42 Gloss black powder coat
#43 Flat black powder coat finish
#62 Grey prime powder coat
#72 Silver metallic powder coat
Custom colors available

MODEL	Duct Velocity Velocity Pressure	400	500	600	700	800	900	1000
		0.010	0.016	0.022	0.031	0.040	0.051	0.062
SDR-06	CFM	78	98	118	137	157	176	196
	Static Pressure	0.11	0.17	0.24	0.33	0.43	0.54	0.66
	NC	21	26	30	35	38	41	44
	Radius of Diffusion	1-2-4	2-3-6	2-4-7	3-4-7	3-5-10	4-6-11	4-6-12
SDR-08	CFM	140	175	209	244	279	314	349
	Static Pressure	0.09	0.14	0.20	0.27	0.35	0.44	0.55
	NC	21	26	30	35	38	41	44
	Radius of Diffusion	2-3-6	3-4-8	3-5-10	4-6-11	4-7-13	5-8-15	6-8-16
SDR-10	CFM	218	273	327	382	436	491	545
	Static Pressure	0.08	0.11	0.18	0.22	0.32	0.36	0.49
	NC	22	27	32	36	39	42	45
	Radius of Diffusion	3-4-8	3-5-10	4-6-12	5-7-14	6-9-17	6-9-18	7-10-20
SDR-12	CFM	314	393	471	550	628	707	785
	Static Pressure	0.08	0.11	0.18	0.22	0.32	0.36	0.49
	NC	22	27	32	36	39	42	45
	Radius of Diffusion	3-5-10	4-6-12	5-8-15	6-9-17	7-10-20	7-11-22	8-12-24
SDR-14	CFM	428	535	641	748	855	962	1069
	Static Pressure	0.08	0.11	0.18	0.22	0.32	0.36	0.49
	NC	22	27	32	36	39	42	45
	Radius of Diffusion	4-6-12	5-7-14	6-9-17	7-10-20	8-12-23	9-13-26	10-14-28
SDR-16	CFM	558	698	838	977	1117	1256	1396
	Static Pressure	0.08	0.11	0.18	0.22	0.32	0.36	0.49
	NC	23	28	33	37	40	43	46
	Radius of Diffusion	4-7-14	5-8-16	7-10-19	8-12-23	9-14-26	10-16-29	11-18-32
SDR-20	CFM	872	1090	1309	1527	1745	1963	2181
	Static Pressure	0.07	0.11	0.15	0.21	0.27	0.35	0.41
	NC	24	30	34	38	42	44	47
	Radius of Diffusion	5-9-18	6-10-20	8-12-24	10-15-28	11-17-31	12-19-35	13-21-37
SDR-24	CFM	1256	1570	1885	2199	2513	2827	3141
	Static Pressure	0.05	0.08	0.12	0.16	0.20	0.25	0.31
	NC	26	32	37	41	44	47	49
	Radius of Diffusion	6-11-22	7-12-24	9-14-28	11-17-32	13-20-36	14-22-40	15-24-42

RADIUS OF DIFFUSION: Horizontal distance (THROW) in feet from the Diffuser at which the maximum velocity has been reduced to specified terminal velocity (Vt).

TERMINAL VELOCITY: Maximum velocity (Vt) in feet per minute at the specified distance from the outlet face (THROW) 150 fpm, 100 fpm and 50 fpm respectively.

AIRFLOW CFM: Standard air density and isothermal conditions.

STATIC PRESSURE: Inches of water gauge required.

NOISE CRITERIA: Noise criteria (NC) curve which is not exceeded with a Room Attenuation of 10db and based on Sound Power Level Re: 10-12 watts.

Performance data based on ASHRAE 70-06